


## Single Row Ball Races LOW MAINTENANCE

The low maintenance ball race series BR-W enjoy a low maintenance life cycle of up to 3 years or 300.000 km  
After that period they are to be serviced in the same way as standard ball races.

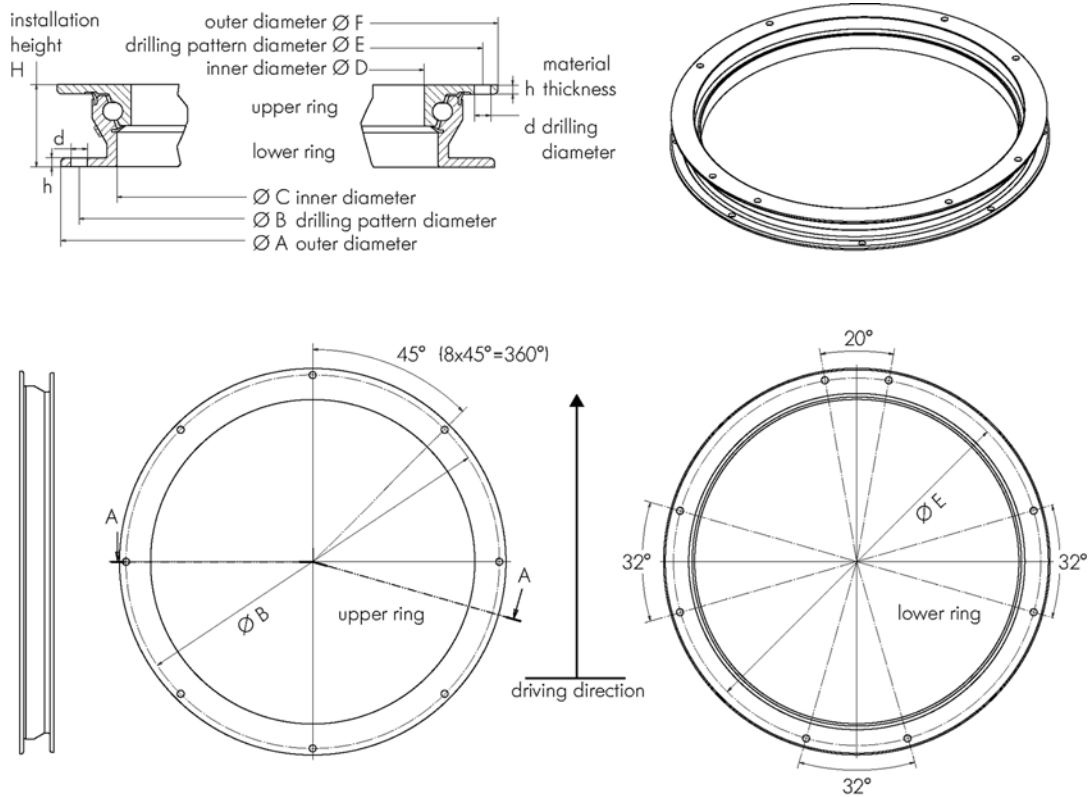

Type	Model	Max. axial load	A	B	C	D	E	F	d	h	H	Weight	Order no.
		t	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg	
BR-W 8	undrilled	8	1000	960	877	846	974	1008	18	10	90	73	<b>662 106 110</b>
BR-W 10	undrilled	10	1000	960	877	846	974	1008	18	10	90	73	<b>662 106 130</b>
BR-W 10-1	drilled	10	1100	1060	977	946	1074	1108	18	10	90	80	<b>662 106 150</b>
<b>BR-W 12-1</b>	<b>drilled</b>	<b>12</b>	<b>1100</b>	<b>1060</b>	<b>977</b>	<b>946</b>	<b>1074</b>	<b>1108</b>	<b>18</b>	<b>10</b>	<b>90</b>	<b>80</b>	<b>662 106 170</b>
BR-W 13-2	drilled	13	1200	1160	1077	1046	1174	1208	18	10	90	87	<b>662 106 190</b>

### Technical data

The specifications are nominal dimensions and are subject to the tolerances at our works.

Ball races from SAF-HOLLAND are suitable for the installation on the front axle of 2- and 3-axle drawbar trailers with a max. permissible speed of 105 km/h (65mph). On 2-axle-trailers the specified axle loads can be exceeded by 10%, at speeds below 30 km/h (18 mph) by 20%.

Please request the permitted loads for forced steering semi-trailers, giving details of the vehicle used.

All data apply to use on paved roads and standard road conditions in Western Europe.